


# MULTIPLE OF LONG-TIME PICKUP

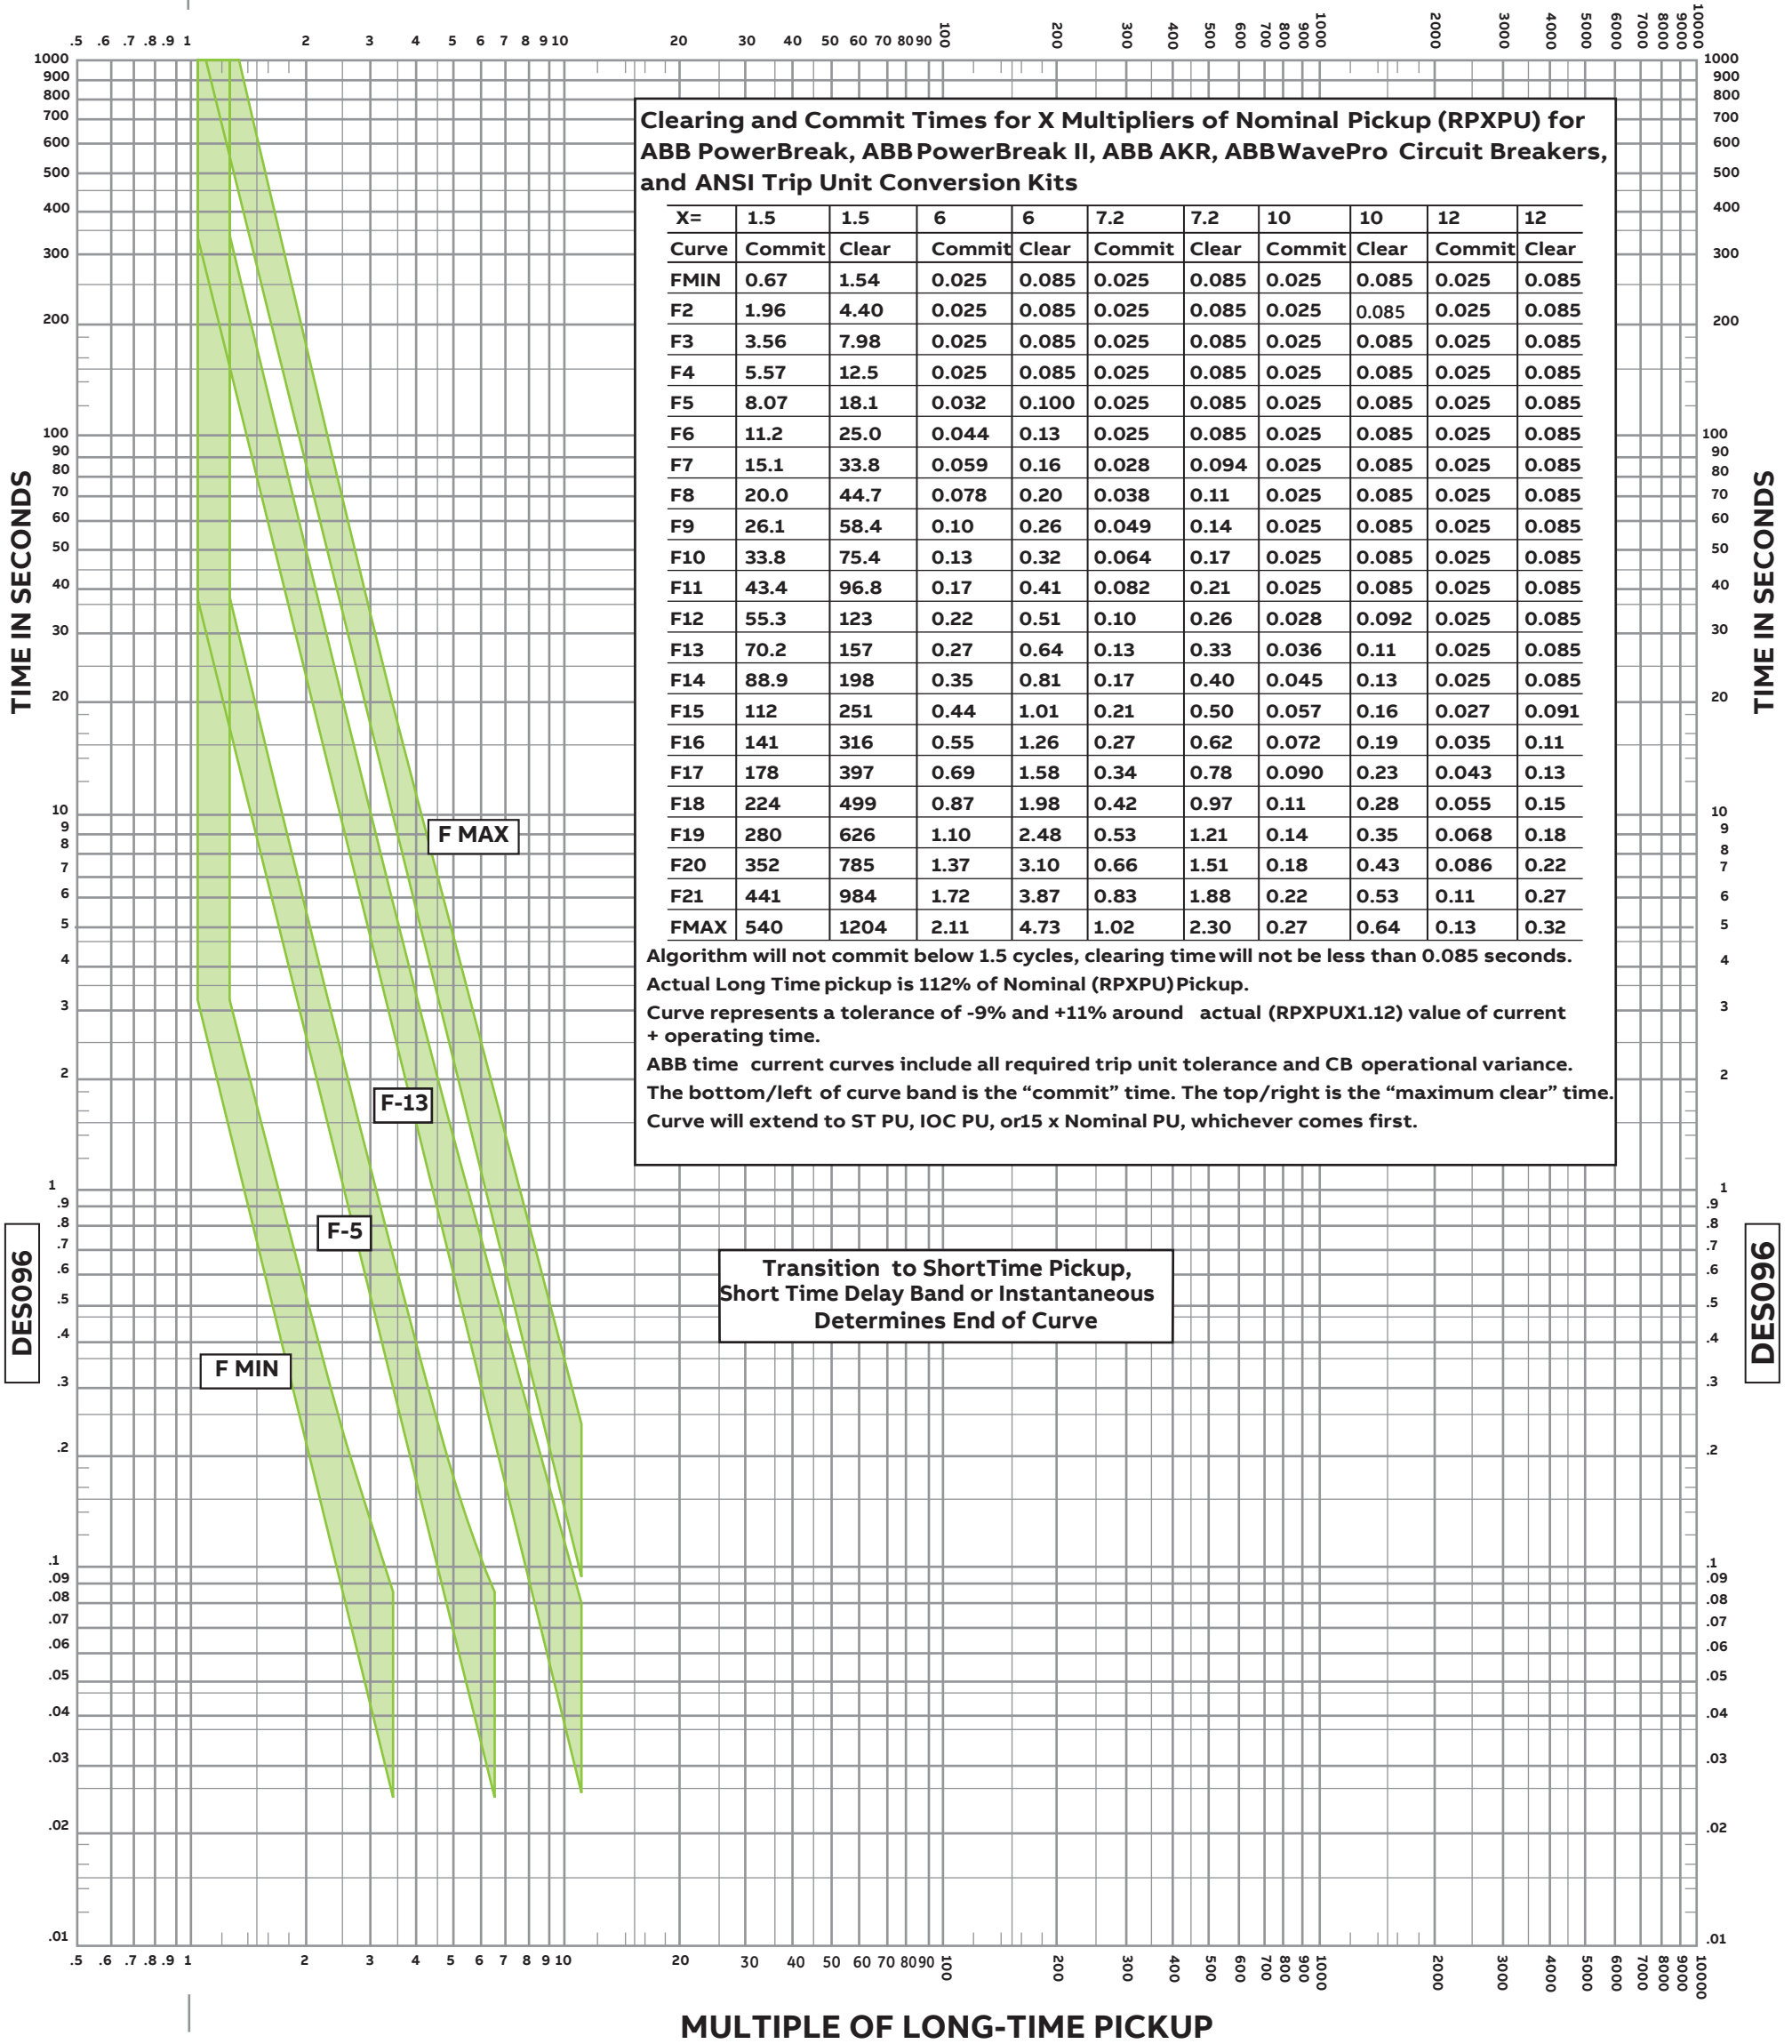

Frames 800-5000A AKR & WavePro  
 Frames 800-4000A PowerBreak & PowerBreak II  
 Trip Unit Conversion Kits 800-5000A

All Voltages: 600 Vac and below

## Low-Voltage Circuit Breakers

EntelliGuard TU Trip Unit for PowerBreak, PowerBreak II, AKR and WavePro Circuit Breakers

UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

ANSI Trip Conversion Kits

Long-Time Fuse Like ( $I^2t$ ) Characteristics

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

## DES096

Nominal Pickup Range  
 0.5X-1.0X Trip Rating Plug