




Metered Rack Power Distribution Unit AP8861, AP8861US

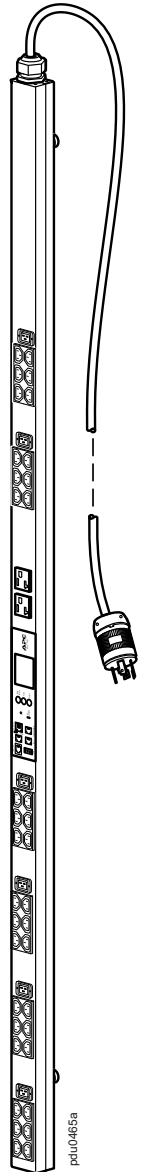


APC
70 Mechanic Street
02035 Foxboro, MA
USA

www.apc.com

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2023 Schneider Electric. APC, the APC logo, and EcoStruxure are trademarks of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

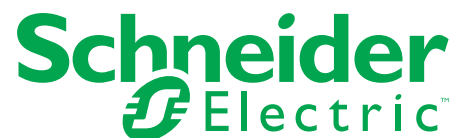

Overview

The APC Metered Rack Power Distribution Unit (PDU) distributes power to devices in the rack. It has a sensor that measures the current that it and its attached devices use. It can be monitored through Web, Telnet, SNMP, SSH, or EcoStruxure™ IT Expert interfaces.


Outlets: The Rack PDU has thirty-six (36) IEC-320-C13 locking outlets, six (6) IEC-320-C19 locking outlets, and two (2) NEMA 5-20R non-locking outlets **1**. (The locking feature is compatible with APC locking input cords and APC locking jumper cords.)

Display interface: The liquid crystal display (LCD) **2** and input buttons **3** allow you to monitor current, power, and voltage measurements of the Rack PDU. Local communication can be established through the serial port **7**, and remote communication through the network port **4**. The USB **8** and CAN **6** ports enable data transfer and communication for future expansion options. The environmental sensor port **5** allows for monitoring of the temperature and humidity of the room or enclosure.

Power cord: The 2-m (6.0-ft) power cord terminates with a NEMA L21-20P connector **9**.

Toolless mounting:

The Rack PDU has two toolless mounting pegs **10** for 0 U mounting capability in a rack or enclosure.

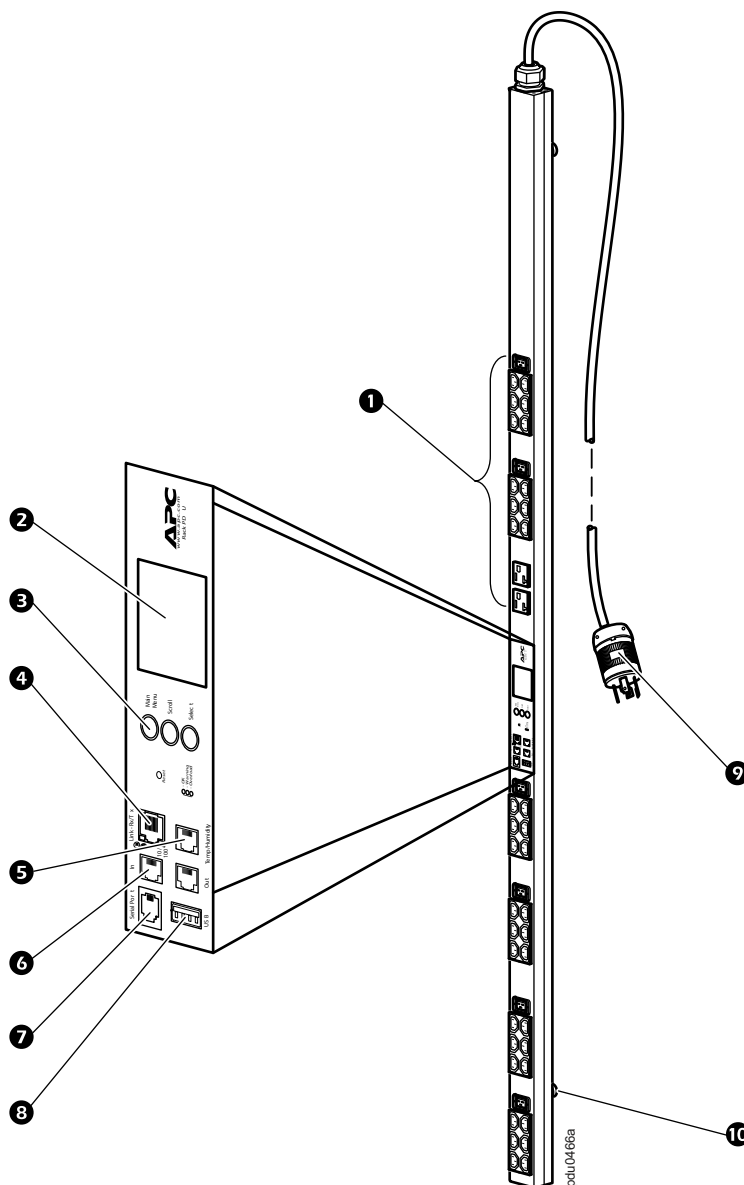

Specifications

AP8861

AP8861US

Electrical

Acceptable input voltage	120/208 VAC \pm 10%, 3-phase
Maximum input current (phase)	16 A UL
Input frequency	50/60 Hz
Input connection	NEMA L21-20P
Input power	5.8 kVA UL
Output voltage	208 VAC (Line-to-Line), 120 VAC (Line-to-Neutral)
Maximum output current (outlet)	IEC-320-C13: 12 A UL IEC-320-C19: 16 A UL NEMA 5-20R: 16 A UL
Maximum output current (phase)	16 A UL
Output connections	Thirty-six (36) IEC-320-C13; six (6) IEC-320-C19; two (2) NEMA 5-20R

Physical

Dimensions (H x W x D) (depth does not include toolless pegs)	177.8 x 5.6 x 4.4 cm (70.5 x 2.2 x 1.7 in)
Power cord length	2 m (6.0 ft)
Shipping dimensions (H x W x D)	192.4 x 16.2 x 10.7 cm (75.8 x 6.4 x 4.2 in)
Weight/shipping weight	6.1 kg (13.5 lb) / 8.0 kg (17.7 lb)

Environmental

Maximum elevation (above MSL) Operating/Storage	0–3 000 m (0–10,000 ft) / 0–15 000 m (0–50,000 ft)
Temperature Operating/Storage	–5 to 60 °C (23 to 140 °F) / –25 to 65 °C (–13 to 149 °F)
Humidity Operating/Storage	5–95% RH, non-condensing

Compliance

EMC verification	FCC, ICES	
Safety verification	UL	
TAA compliant	No	Yes